


“Stay Connected” with



Solar Power Components

a PennEngineering® Company

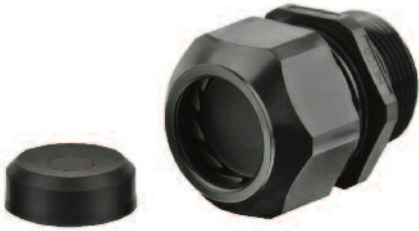

## Heyco® -Tite Tear-Away Liquid Tight Cordgrips


Straight-Thru, Metric Hubs with Integral Sealing Ring

The Ultimate in Liquid Tight Strain Relief Protection



CABLE DIAMETER RANGE				PART NO.				DESCRIPTION	PART DIMENSIONS									
Minimum		Maximum		Including Nylon Nut*		No Nut			A		B		C		D		E	
in.	mm.	in.	mm.	Black	Gray	Black	Gray	in.	mm.	in.	mm.	in.	mm.	in.	mm.	in.	mm.	
<b>Metric Hubs</b>																		
.170	4,3	.450	11,4	M4340-SM	M4341-SM	M4372-SM	M4373-SM	SMCG M20	.787	20,0	1.53	38,9	.41	10,4	.21	5,3	.98	24,9
.260	6,6	.545	13,8	M3198-SM	M3199-SM	M4360-SM	M4361-SM	SMCG LL M20	.787	20,0	1.65	41,9	.43	10,9	.25	6,4	.98	24,9
.435	11,0	.706	17,9	M4344-SM	M4345-SM	M4376-SM	M4377-SM	SMCG M25	.985	25,0	1.89	48,0	.52	13,2	.25	6,4	1.30	33,0
.590	15,0	1.000	25,4	M4348-SM	M4349-SM	M4380-SM	M4381-SM	SMCG M32	1.260	32,0	2.23	56,6	.57	14,5	.30	7,6	1.73	43,9
.865	22,0	1.260	32,0	M4352-SM	M4353-SM	M4384-SM	M4385-SM	SMCG M40	1.575	40,0	2.39	60,7	.47	11,9	.30	7,6	2.05	52,1
1.230	31,2	1.560	39,6	M3300-SM	M3301-SM	-	-	SMCG M50	1.970	50,0	2.50	63,5	.48	12,2	.36	9,1	2.46	62,5
1.450	36,8	1.730	43,9	M3304-SM	M3305-SM	-	-	SMCG M63	2.480	63,0	2.63	66,8	.50	12,7	.42	10,7	2.73	69,3

\*Nylon locknuts shipped unassembled.

- The **New Tear-Away** Liquid Tight Cordgrips install as a plug to keep rain, insects and air contaminants outside of an enclosure that is waiting at field installation sites or even within a manufacturing setting for a prolonged period of time.
- **Note:** UL Certifications apply only when used as a cordgrip, not as a plug; When used as a plug, we meet IPx8 @ 2.6 PSI for 24 hrs, and IPx5.
- Units remain internally clean and moisture free until cable installation as a Heyco standard, and market-leading Cable Gland with full functionality that you have come to expect.
- Simply puncture the gland edge with a flat-head screwdriver and Tear-Away the ID for cable pass through like a standard Heyco Cable Gland.
- **Integral Sealing Ring** ensures a superior seal at the clearance or threaded mounting locaton.
- Approved for **NEMA 4, 4X, 6 and 6P applications** with use of nylon locknuts.
- IP 68 rated.
- Cordgrips are made of nylon construction with TPE sealing glands that resist salt water, weak acids, gasoline, alcohol, oil, grease, and common solvents.
- Consult Heyco for Cordgrips molded in other colors.

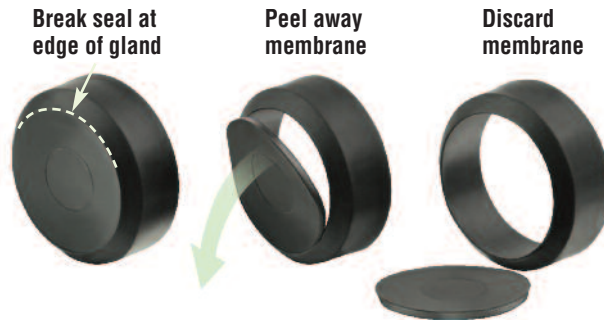

Click here or scan for assembly instructions

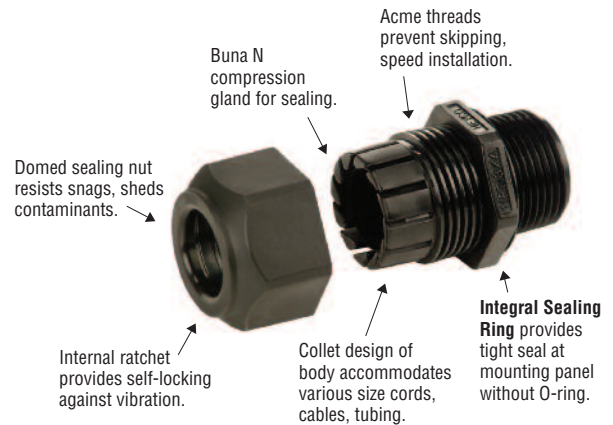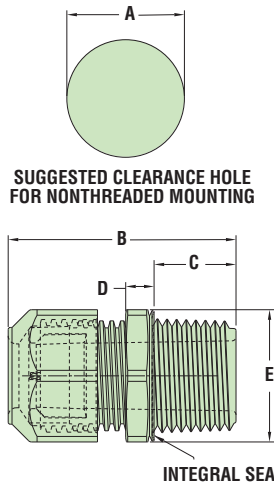

Material	Nylon 6/6 with TPE Sealing Gland
Certifications (when used as Cordgrip)	<ul style="list-style-type: none"> <li>UL Listed under Underwriters' Laboratories File E51579</li> <li>cRUUS Recognized under the Component Program of Underwriters' Laboratories File E51579 to both Canadian and U.S. requirements</li> <li>CS Certified by the Canadian Standards Association File 93876</li> </ul>
Flammability Rating	94V-2 Standard
Temperature Range	Static -40°F (-40°C) to 239°F (115°C) Dynamic -4°F (-20°C) to 212°F (100°C)
IP Rating	IP 68 (70 PSI, 5 BAR) (IPx8 @ 2.6 PSI for 24 hrs and IPx5, when used as plug)