

“Stay Connected” with



Solar Power Components

a PennEngineering® Company




Heyco® Bi-Directional SunRunner®

PANEL WIDTH CLAMPING RANGE				WIRE DIAMETER RANGE	PART NO. 301 Stainless	DESCRIPTION	FOOTPRINT		OVERALL HEIGHT	
Minimum		Maximum					A x B		C	
in.	mm.	in.	mm.			in.	mm.	in.	mm.	
.045	1,1	.080	2,0	.20" (5,1 mm) - .33" (8,4 mm) each cable	S6590	Bi-Directional SunRunner® Short Flange – 100 Pack	.78 x	19,8 x	0,39	9,9
				S6591	Bi-Directional SunRunner® Short Flange – Bulk	.96	24,4			



- The New Bi-Directional Heyco SunRunner is a one-piece fits all for routing PV wire North-South, or East-West.
- With TWO locking features built into the design, you only need one SKU during an installation to route PV wires in either direction.
- Heyco's SunRunner's robust "double-compression" design securely holds a variety of cables ranging from .20" (5,1 mm) to .33" (8,4 mm) in diameter.
- Heyco SunRunner Clips are designed to provide a better method for PV module wire management and may be used wherever single or multiple cable management is needed.
- Smooth clip edges prevent damage to cable insulation.
- Locking tabs securely fasten clips to module extrusions, or other panels.
- Generous lead-in for installation without tools.
- Neatly dresses cables on PV panel frames or along mounting channels.
- Constructed from corrosion resistant 301 stainless steel, not for use in a marine salt water environment.

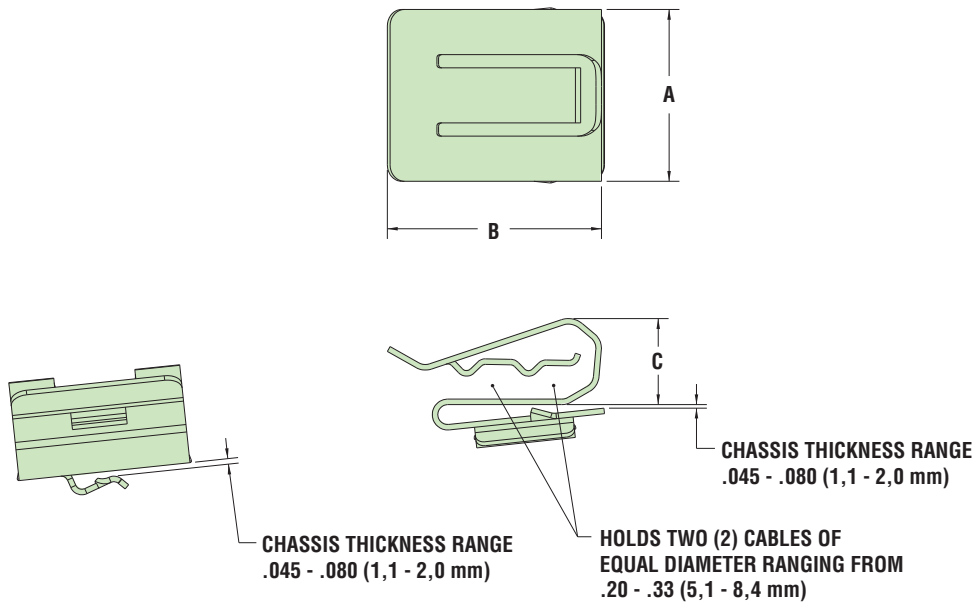

Material .025" thick 301 stainless steel
 Certifications Certified by UL for Compliance with both Canadian and US Requirements under File E54523
 Temperature Range -40°F (-40°C) to 572°F (300°C)

Quick Specs