

“Stay Connected” with



Liquid Tight Cordgrips

a PennEngineering® Company

Heyco® -Tite Brass Liquid Tight Cordgrips

Metric Hubs


Explosion Proof for Hazardous Locations

The Ultimate in Liquid Tight Strain Relief Protection



CABLE DIAMETER RANGE				PART NO.	THREAD SIZE	PART DIMENSIONS							
Minimum		Maximum				A Clearance Hole Dia.		B Max. O.A. Length		C Thread Length		D Wrenching Flat Size	
in.	mm.	in.	mm.			in.	mm.	in.	mm.	in.	mm.	in.	mm.
.118	3,0	.276	7,0	14830	M16 x 1,5	.630	16,0	1.50	38,0	.47	12,0	.83	21,0
.197	5,0	.394	10,0	14831		.630	16,0	1.50	38,0	.47	12,0	.94	24,0
.197	5,0	.433	11,0	14832	M20 x 1,5	.787	20,0	1.50	38,0	.47	12,0	.94	24,0
.354	9,0	.551	14,0	14833		.787	20,0	1.50	38,0	.47	12,0	1.18	30,0
.295	7,5	.591	15,0	14834	M25 x 1,5	.984	25,0	1.57	40,0	.47	12,0	1.26	32,0
.492	12,5	.709	18,0	14835		.984	25,0	1.57	40,0	.47	12,0	1.26	32,0
.669	17,0	.906	23,0	14836	M32 x 1,5	1.260	32,0	1.77	45,0	.47	12,0	1.61	41,0
.827	21,0	1.024	26,0	14837		1.260	32,0	1.77	45,0	.47	12,0	1.61	41,0
.827	21,0	1.024	26,0	14838	M40 x 1,5	1.575	40,0	1.85	47,0	.55	14,0	1.61	41,0
.945	24,0	1.260	32,0	14839		1.575	40,0	1.89	48,0	.55	14,0	1.97	50,0
1.102	28,0	1.417	36,0	14840	M50 x 1,5	1.968	50,0	1.89	48,0	.55	14,0	2.17	55,0
1.378	35,0	1.654	42,0	14841		1.968	50,0	1.93	49,0	.55	14,0	2.36	60,0
1.417	36,0	1.732	44,0	14842	M63 x 1,5	2.480	63,0	1.93	49,0	.55	14,0	2.56	65,0
1.693	43,0	1.968	50,0	14843		2.480	63,0	1.93	49,0	.55	14,0	2.76	70,0

- Suitable for flameproof enclosures Ex d 11C and increased safety Ex e 11
- Certificate: EC-type examination certificate PTB 10 ATEX 1034X
- Certificate: IECEx Certificate: IECEx PTB 12.0055x
- Certified for category 2G: II 2G Ex db eb IIC
- Certified for category 2D: II 2D Ex ta IIIC
- Zone: Gas 1 and 2/dust 21 and 22

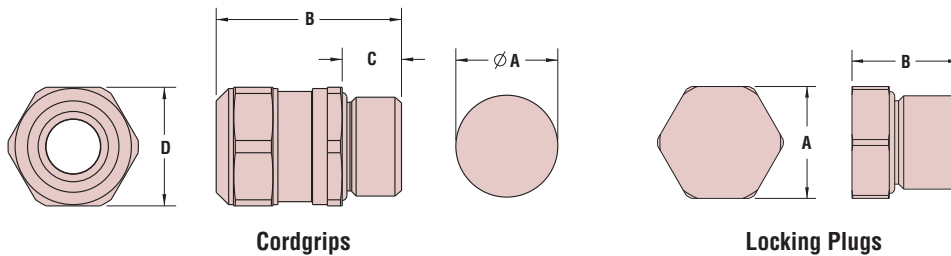

Heyco® -Tite Brass Locking Plugs

Metric Hubs

THREAD TYPE / SIZE	PART NO.	DESCRIPTION	PART DIMENSIONS			
			A Wrenching Flats		B Overall Length	
			in.	mm.	in.	mm.
M12 x 1,5	14691	BRASS TPX M12	.59	15,0	.79	20,0
M16 x 1,5	14692	BRASS TPX M16	.71	18,0	.83	21,0
M20 x 1,5	14693	BRASS TPX M20	.94	24,0	.91	23,0
M25 x 1,5	14694	BRASS TPX M25	1.18	30,0	.98	25,0
M32 x 1,5	14695	BRASS TPX M32	1.42	36,0	1.06	27,0
M40 x 1,5	14696	BRASS TPX M40	1.81	46,0		
M50 x 1,5	14697	BRASS TPX M50	2.17	55,0		
M63 x 1,5	14698	BRASS TPX M63	2.76	70,0		



- Suitable for flameproof enclosures Ex d IIC
- IECEx Certificate: 1ECEx PTB 12.0056
- Certified for category 2G: II 2G Ex db eb IIC
- Certified for category 2D: II 2D Ex ta IIIC
- Zone: Gas 1 and 2/dust 21 and 22

	Cordgrips	Locking Plugs
Material	Nickel-Plated Brass Body w/NBR Seal	Nickel-Plated Brass Body w/FPM O-Ring
Temperature Range	-76°F (-60°C) to 221°F (105°C)	-40°F (-40°C) to 212°F (100°C)
IP Rating	IP 68, IP 69K	IP 69K

Quick Specs