





## HEYClean™ Filter Insert Vent Plugs

Mounting Hole Diameter Range: .500" (12,7 mm) to 3.000" (76,2 mm)

MOUNTING HOLE DIAMETER		PART NO.	DESCRIPTION	No. of Vent Holes	PART DIMENSIONS			
in.	mm.				Black	A Head Diameter	B Overall Height	
		Multiple Locking Steps for Panel Thickness up to .125" (3,2 mm)						
.500	12,7	<b>4917</b>	FIVP 500	4	.56	14,2	.41	10,4
.875	22,2	<b>4919</b>	FIVP 875	9	1.02	25,8	.45	11,5
1.000	25,4	<b>4921</b>	FIVP 1000	9	1.20	30,6		
1.093 - 1.125	27,8 - 28,6	<b>4923</b>	FIVP 1093	9	1.22	30,9	.45	11,5
1.375	34,9	<b>4931</b>	FIVP 1375	11	1.50	38,1		
1.500	38,1	<b>4933</b>	FIVP 1500	13	1.67	42,4		
2.000	50,8	<b>4937</b>	FIVP 2000	19	2.14	54,4	.47	11,9
		Multiple Locking Steps for Panel Thickness up to .250" (6,4 mm)						
.875	22,2	<b>4973</b>	FIVPT 875	9	1.02	25,8	.56	14,3
1.000	25,4	<b>4975</b>	FIVPT 1000	9	1.20	30,6		
1.093 - 1.125	27,8 - 28,6	<b>4977</b>	FIVPT 1093	9	1.22	30,9	.56	14,3
1.375	34,9	<b>4983</b>	FIVPT 1375	11	1.50	38,1		
1.500	38,1	<b>4985</b>	FIVPT 1500	13	1.67	42,4		
2.000	50,8	<b>4989</b>	FIVPT 2000	19	2.14	54,4	.58	14,7
2.500	63,5	<b>4939</b>	FIVP 2.5	19	2.72	69,0	.75	19,1
3.000	76,2	<b>4941</b>	FIVP 3.0	26	3.15	80,0	.74	18,8

Standard color black. Consult Heyco for other colors.

- Filter inserts permit the passage of air for ventilation but limit liquid as well as dust and pest infiltration.
- Polyurethane foam filter will filter particle sizes 30 micron and larger.
- Filter is captive in body of vent plug and uses no additional real estate inside.

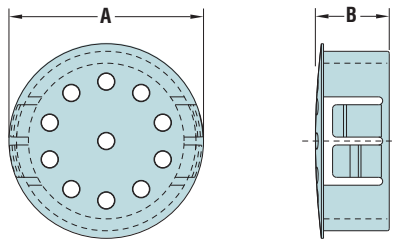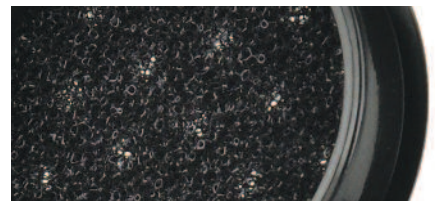

Material	Nylon 6/6
Flammability Rating	94V-2
Temperature Range	-40°F (-40°C) to 221°F (105°C)

Quick Specs