


“Stay Connected” with



HEYware Products

a PennEngineering® Company

## Heyco® Nylon PCB Supports - Blind and Key Slot Mount

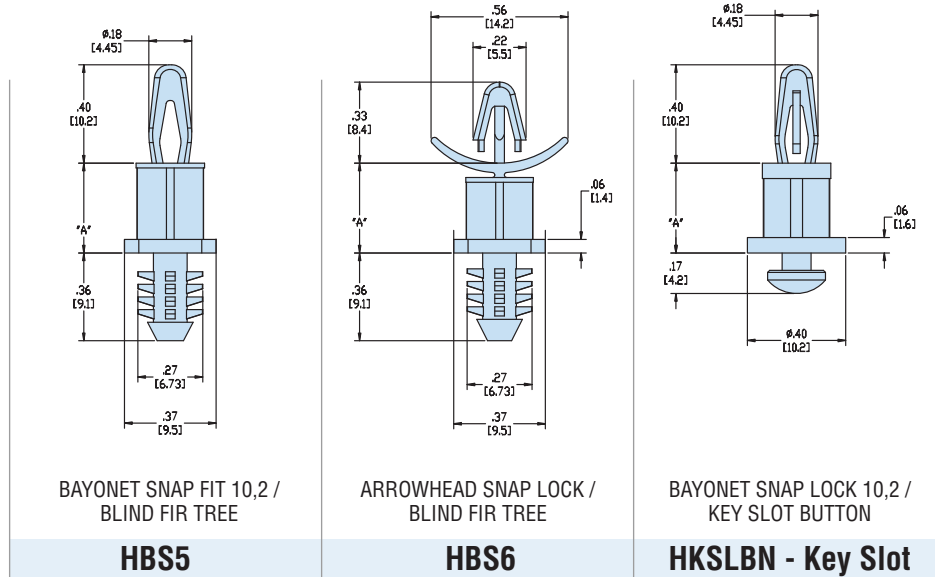


	Thickness		Mounting Hole Diameter		Thickness		Mounting Hole Diameter		Thickness		Mounting Slot Width	
	in.	mm.	in.	mm.	in.	mm.	in.	mm.	in.	mm.	in.	mm.
<b>PCB - Max</b>	.062	1,6	.157	4,0	.078	2,0	.157	4,0	.062	1,6	.157	4,0
<b>Chassis - Min/Max*</b>	.250	6,4	.250	6,4	.250	6,4	.250	6,4	.062	1,6	see diagram	

A		PART NO.	DESCRIPTION	PART NO.	DESCRIPTION	PART NO.	DESCRIPTION
in.	mm.	Natural		Natural		Natural	
.125	3,2					<b>10611</b>	HKSLBN-02
.187	4,8	<b>10587</b>	HBS5-03				
.250	6,4	<b>10588</b>	HBS5-04	<b>10596</b>	HBS6-04	<b>10612</b>	HKSLBN-04
.375	9,5	<b>10589</b>	HBS5-06	<b>10597</b>	HBS6-06	<b>10613</b>	HKSLBN-06
.437	11,1	<b>10590</b>	HBS5-07				
.500	12,7	<b>10591</b>	HBS5-08	<b>10598</b>	HBS6-08	<b>10614</b>	HKSLBN-08
.625	15,9	<b>10592</b>	HBS5-10	<b>10599</b>	HBS6-10		
.750	19,1	<b>10593</b>	HBS5-12	<b>10600</b>	HBS6-12		
.875	22,2	<b>10594</b>	HBS5-14	<b>10601</b>	HBS6-14		

Standard color natural. For special order parts in UL 94V-0 natural material, add the suffix “F” to Part No.

\*Chassis Thickness – Minimum for HBS5 and HBS6 as there is no Maximum on a Blind Hole application. Maximum chassis thickness for HKSLBN.

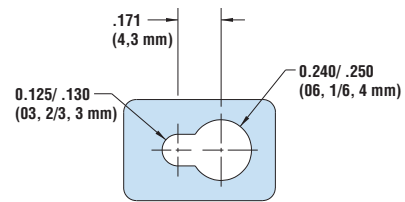

RECOMMENDED PANEL CUT-OUT FOR HKSLBN

Material: Nylon 6/6  
 Flammability Rating: 94V-2  
 Temperature Range: -40°F (-40°C) to 185°F (85°C)

Quick Specs