

“Stay Connected” with



Power Components

a PennEngineering® Company

## Heyco® Plug-In Device Contacts

Type	PART DATA			PART NO.		Feeds
	Overall Length in.	AWG Range	Material	Non-polarized	Polarized	
Flat	1.00	Solder	Brass	<b>8063</b>	-	Left to Right
	.80	Solder	Brass	<b>8178</b>	-	
Flat	1.00	Solder	Brass	<b>5029†</b>	<b>5031†</b>	Bulk
				<b>5030††</b>	-	
	1.03	Solder	Brass	<b>8179*</b>	-	
Spring	1.28	Solder	Brass	<b>5021</b>	-	
Flat	1.30	Solder	Brass	<b>8172</b>	-	
				<b>8191†††</b>	-	
	1.97	Solder	Brass	<b>8192</b>	-	


**NEW!**

† Part Nos. 5029 and 5031 must be ordered together.


†† Part No. 5030 has straight sides

††† No hole.


\*Part No. 8179 for .078" Max PCB Thickness




**8063**




**8178**

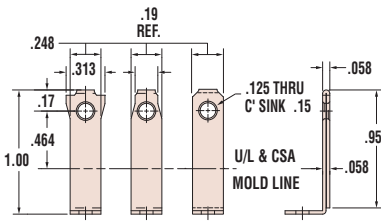


**5031/5029, 5030**




**8179**



**5021**




**8172**

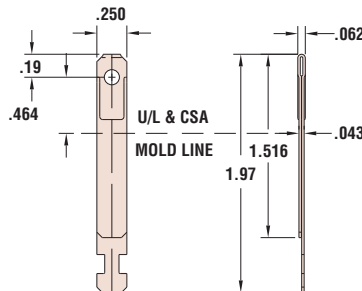

**8191/8192**



- **Designed for cordless OEM products** that plug directly into an electrical outlet:
  - Plug-in Transformers
  - Plug-in Electronic Power Supplies
  - Plug-in Electronic Enclosures
  - Plug-in Rodent and Other Pest Control Devices
  - Plug-in Air Fresheners and Insect Repellents
  - Plug-in Smoke and Carbon Monoxide Sensors and Alarms
  - Plug-in Timers
  - Plug-in Night Lights
- Plug-In Contacts are not UL or CSA approved.
- DFARS Compliant

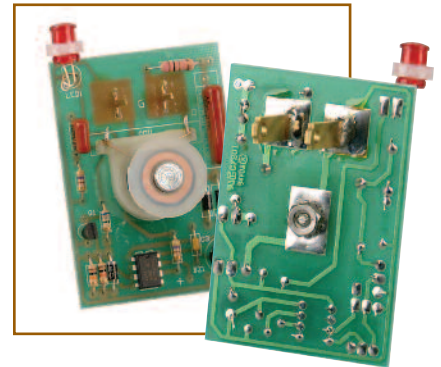

Material

Alloy 260 Brass (70% Cu, 30% Zn. Higher Cu content resists dezincification)

*Quick Specs*