




Heyco®-Tite Quick Nut

- Quick nut offers a fast installation.
- Simply push the quick nut onto the threaded stud and tighten half a turn with a wrench. To remove, unscrew with a wrench.
- Insertion force onto the stud is low, while extraction force is high.

THREAD SIZE A		PART NO.		DESCRIPTION	PART DIMENSIONS			
METRIC	IMPERIAL	BLACK	NATURAL		B Thickness		C Wrenching Flats	
					in.	mm	in.	mm
M3	#4	11560B	11560	HQN M3	.17	4,2	.27	6,9
M4	#8	11561B	11561	HQN M4	.19	4,8	.31	7,9
M5	#10	11562B	11562	HQN M5	.23	5,8	.39	9,9
M6	1/4-20	11563B	11563	HQN M6	.27	6,9	.50	12,7
NEW!	M8	11564B	11564	HQN M8	.34	8,6	.67	17,0
NEW!	M10	11565B	11565	HQN M10	.41	10,5	.75	19,0

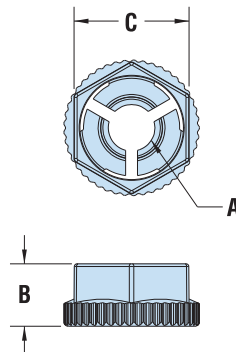

*Quick
Specs*

Material PA66 UL 94V-2
 Temperature range 32°F (0°C) to 185°F (85°C)