

"Stay Connected" with



HEYware Products

a PennEngineering® Company



STANDARD
PACK
1,000/BAG

Heyco® Snap Latch Rivets

Grommet

- Designed for fast and easy installation and removal - simply push to fasten and pull to release.
- Ideal for frequent maintenance work.
- Typical applications include metal enclosures, telecom equipment, appliances and electrical equipment.

FIXED PANEL HOLE DIAMETER		REMOVABLE PANEL THICKNESS		PART NO.		DESCRIPTION	MATING PLUNGER		PART DIMENSIONS					
in.	mm.	in.	mm.	Black	White		Black	White	A Body Length		B Head Diameter		C Head Height	
								in.	mm.	in.	mm.	in.	mm.	
.253	6,4	.043	1,1	12283	12284	HSLG-1M	12261	12262	.31	8,0	.33	8,5	.07	1,8
		.063	1,6	12285	12286	HSLG-2M	12263	12264	.33	8,5				
		.098	2,5	12287	12288	HSLG-3M	12265	12266	.37	9,5				
		.161	4,1	12289	12290	HSLG-4M	12267	12268	.43	11,0				
.319	8,1	.043	1,1	17000	17000W	HSLG-SL	17005	17005W	.34	8,6	.43	10,8	.08	2,0
		.063	1,6	17001	17001W	HSLG-1L	17006	17006W	.35	9,0				
		.098	2,5	17002	17002W	HSLG-2L	17007	17007W						
		.161	4,1	17003	17003W	HSLG-3L	17008	17008W	.39	10,0				
		.209	5,3	17004	17004W	HSLG-4L	17009	17009W	.46	11,7				
							17010	17010W	.51	12,9				

NEW!

Alternative Plunger Listing

GROMMETS		ALTERNATE PLUNGERS			
Black	White	Black	White	DESC.	
17000	17000W	17011	17011W	HSLPB-SL	
17001	17001W	17012	17012W	HSLPB-1L	
17002	17002W	17013	17013W	HSLPB-2L	
17003	17003W	17014	17014W	HSLPB-3L	
17004	17004W	17015	17015W	HSLPB-4L	

Standard colors black and white.

Plunger

REMOVABLE PANEL HOLE DIAMETER	ASSEMBLED PANEL THICKNESS RANGE				PART NO.		DESCRIPTION	PLUNGER STYLE		MATING GROMMET		
	Minimum in.	Maximum in.	Minimum mm.	Maximum mm.	Black	White		Fig.	Alt.	Black	White	
in.	mm.	in.	mm.	in.	mm.	Black	White			Black	White	
.237	6,0	.059	1,5	.146	3,7	12261	12262	HSLPB-1M	4	N/A	12283	12284
		.079	2,0	.165	4,2	12263	12264	HSLPB-2M	4		12285	12286
		.118	3,0	.205	5,2	12265	12266	HSLPB-3M	4		12287	12288
		.181	4,6	.272	6,9	12267	12268	HSLPB-4M	4		12289	12290
.299	7,6	.059	1,5	.146	3,7	17005	17005W	HSLPL-SL	1	3	17000	17000W
		.079	2,0	.165	4,2	17006	17006W	HSLPL-1L	1	3	17001	17001W
		.118	3,0	.205	5,2	17007	17007W	HSLPL-21L	2	3		
		.181	4,6	.272	6,9	17008	17008W	HSLPL-2L	1	3	17002	17002W
		.228	5,8	.315	8,0	17009	17009W	HSLPL-3L	1	3	17003	17003W
						17010	17010W	HSLPL-4L	1	3	17004	17004W

NEW!

Standard colors black and white.

Fig. 1



Fig. 2



Fig. 3





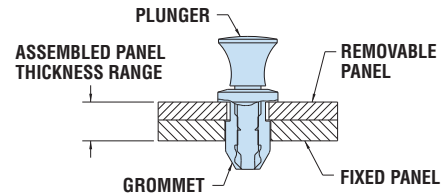




Fig. 1

Fig. 2

Fig. 3 (Alternate)

Fig. 4

Quick Specs

	Plunger:	Grommet:
Material	Nylon 6	Heat Stabilized Polycarbonate
Flammability Rating	UL 94V-2	UL 94V-2
Temperature Range	-40°F (-40°C) to 185°F (85°C)	-22°F (-30°C) to 257°F (125°C)