

“Stay Connected” with



Solar Power Components

a PennEngineering® Company


## Heyco® Stainless Steel Cable Ties

Ball Lock Stainless Steel Strip Cable Ties - Standard and PVC Coated

PART SPECIFICATIONS				PART NO.		DESCRIPTION	PART DIMENSIONS			
Min. Tensile Strength		Max. Bundle Diameter		Standard Steel	PVC Coated Black		A Length		B Width	
Lbs.	N	in.	mm.			in.	mm.	in.	mm.	
<b>AISI 304</b>										
112	500	0.98	25.0	<b>12800</b>	<b>12800B</b>	NTSS-0100-46A	3.94	100.0	.18	4.6
		1.18	30.0	<b>12801</b>	<b>12801B</b>	NTSS-0150-46A	5.91	150.0		
		2.00	51.0	<b>12802</b>	<b>12802B</b>	NTSS-0200-46A	7.87	200.0		
		2.56	65.0	<b>12803</b>	<b>12803B</b>	NTSS-0250-46A	9.84	250.0		
		2.99	76.0	<b>12805</b>	<b>12805B</b>	NTSS-0300-46A	11.81	300.0		
		3.74	95.0	<b>12806</b>	<b>12806B</b>	NTSS-0350-46A	13.78	350.0		
		4.33	110.0	<b>12808</b>	<b>12808B</b>	NTSS-0400-46A	15.75	400.0		
		5.43	138.0	<b>12810</b>	<b>12810B</b>	NTSS-0500-46A	19.69	500.0		
		7.09	180.0	<b>12812</b>	<b>12812B</b>	NTSS-0600-46A	23.62	600.0		
		9.45	240.0	<b>12814</b>	<b>12814B</b>	NTSS-0800-46A	31.50	800.0		
		11.81	300.0	<b>12815</b>	<b>12815B</b>	NTSS-1000-46A	39.37	1000.0		
250	1115	1.18	30.0	<b>12820</b>	<b>12820B</b>	NTSS-0150-79A	5.91	150.0	.31	7.9
		2.00	51.0	<b>12821</b>	<b>12821B</b>	NTSS-0200-79A	7.87	200.0		
		2.56	65.0	<b>12822</b>	<b>12822B</b>	NTSS-0250-79A	9.84	250.0		
		2.99	76.0	<b>12824</b>	<b>12824B</b>	NTSS-0300-79A	11.81	300.0		
		3.74	95.0	<b>12825</b>	<b>12825B</b>	NTSS-0350-79A	13.78	350.0		
		4.33	110.0	<b>12827</b>	<b>12827B</b>	NTSS-0400-79A	15.75	400.0		
		4.53	115.0	<b>12828</b>	<b>12828B</b>	NTSS-0150-46A	17.72	450.0		
		5.43	138.0	<b>12829</b>	<b>12829B</b>	NTSS-0500-79A	19.69	500.0		
		7.09	180.0	<b>12831</b>	<b>12831B</b>	NTSS-0600-79A	23.62	600.0		
		8.27	210.0	<b>12833</b>	<b>12833B</b>	NTSS-0700-79A	27.56	700.0		
		9.45	240.0	<b>12834</b>	<b>12834B</b>	NTSS-0800-79A	31.50	800.0		
11.81	300.0	<b>12836</b>	<b>12836B</b>	NTSS-1000-79A	39.37	1000.0				
<b>AISI 316</b>										
<b>NEW PRODUCT</b>										
112	500	0.98	25.0	<b>12850</b>	<b>12850B</b>	NTSS-0100-46B	3.94	100.0	.18	4.6
		1.18	30.0	<b>12851</b>	<b>12851B</b>	NTSS-0150-46B	5.91	150.0		
		2.00	51.0	<b>12852</b>	<b>12852B</b>	NTSS-0200-46B	7.87	200.0		
		2.56	65.0	<b>12853</b>	<b>12853B</b>	NTSS-0250-46B	9.84	250.0		
		2.99	76.0	<b>12855</b>	<b>12855B</b>	NTSS-0300-46B	11.81	300.0		
		3.74	95.0	<b>12856</b>	<b>12856B</b>	NTSS-0350-46B	13.78	350.0		
		4.33	110.0	<b>12858</b>	<b>12858B</b>	NTSS-0400-46B	15.75	400.0		
		5.43	138.0	<b>12860</b>	<b>12860B</b>	NTSS-0500-46B	19.69	500.0		
		7.09	180.0	<b>12862</b>	<b>12862B</b>	NTSS-0600-46B	23.62	600.0		
		9.45	240.0	<b>12864</b>	<b>12864B</b>	NTSS-0800-46B	31.50	800.0		
		11.81	300.0	<b>12865</b>	<b>12865B</b>	NTSS-1000-46B	39.37	1000.0		
250	1115	1.18	30.0	<b>12870</b>	<b>12870B</b>	NTSS-0150-79B	5.91	150.0	.31	7.9
		2.00	51.0	<b>12871</b>	<b>12871B</b>	NTSS-0200-79B	7.87	200.0		
		2.56	65.0	<b>12872</b>	<b>12872B</b>	NTSS-0250-79B	9.84	250.0		
		2.99	76.0	<b>12874</b>	<b>12874B</b>	NTSS-0300-79B	11.81	300.0		
		3.74	95.0	<b>12875</b>	<b>12875B</b>	NTSS-0350-79B	13.78	350.0		
		4.33	110.0	<b>12877</b>	<b>12877B</b>	NTSS-0400-79B	15.75	400.0		
		4.53	115.0	<b>12878</b>	<b>12878B</b>	NTSS-0450-79B	17.72	450.0		
		5.43	138.0	<b>12879</b>	<b>12879B</b>	NTSS-0500-79B	19.69	500.0		
		7.09	180.0	<b>12881</b>	<b>12881B</b>	NTSS-0600-79B	23.62	600.0		
		8.27	210.0	<b>12883</b>	<b>12883B</b>	NTSS-0700-79B	27.56	700.0		
		9.45	240.0	<b>12884</b>	<b>12884B</b>	NTSS-0800-79B	31.50	800.0		
11.81	300.0	<b>12886</b>	<b>12886B</b>	NTSS-1000-79B	39.37	1000.0				



- For ease of assembly, position locking head so that the widest end is down.
- Part Description Key: NTSS-XXXX-YYA where XXXX = length (mm) and YYA = width (mm) with A indicating AISI 304 stainless steel and B indicating AISI 316 stainless steel.
- Stainless steel cable ties have more strength and better durability than nylon cable ties.
- Locking ball design for maximum holding strength and ease of installation.
- Coated ties offer additional protection and separation of dissimilar metals for improved corrosion resistance.
- Suitable for harsh outdoor environments; conform to standard IEC92 for Marine Electrical Appliances and the requirements of CB1113-85 “Plastic Covered Metal Cable Ties”, “Steel Sea Boats Construction Level Standard.”
- Secure bundles in moist and high temperature environments with decay, fire, corrosion, and radio resistance.
- Widely used in shipping, communication, and flight applications.
- .010" (0,3 mm) thick.
- Custom lengths available.
- 100 pack standard.

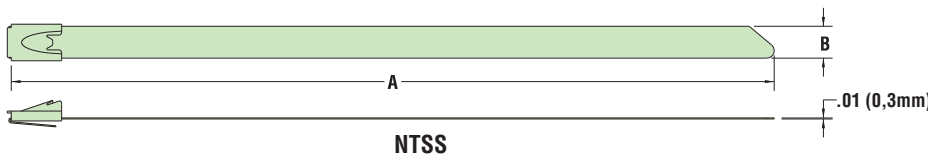

Materials

AISI 304 or 316 stainless steel with PVC coating

Quick Specs