


- For continuous grounding wire runs often found in solar applications.
- Available in plated and unplated versions.
- UL/CSA approved for direct burial; suitable for both indoor and outdoor use.
- Least expensive aluminum option suitable for indoor use only.
- Recommended wire range AWG 4 thru AWG 14.
- DFARS Compliant.

## Heyco® Copper and Aluminum LugRunners®

Wire Range AWG	PART NO.	DESCRIPTION	CONSTRUCTION	PART DIMENSIONS (in.)					
				A	B	C	D	F	H
4-14	<b>S6525</b>	LC 14-4 1-Pole Cu Tinned	Tinned Copper with Stainless Steel Set Screw	1.05	.75	.38	.22	.19	.17
	<b>S6526</b>	LC 14-4 1-Pole Cu	Copper with Stainless Steel Set Screw	1.04	.75	.38	.22	.21	.17
	<b>S6527</b>	LC 14-4 1-Pole Al	Aluminum with Steel Set Screw	1.07	.75	.38	.22	.19	.15

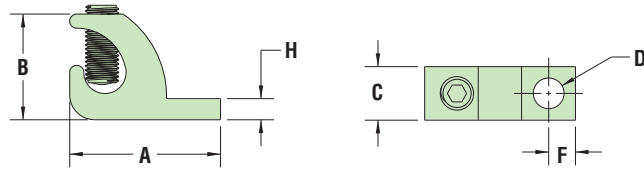


Material Tinned copper or copper with stainless steel set screw or High Strength, High Conductive Aluminum Alloy 606/T6 with stainless steel set screw  
 Certifications Listed under Underwriters' Laboratories File E467246




## Heyco® SunJumpers®

- Tinned copper, Heavy Duty Ring Terminals at both ends.
- Approved to UL 467 Grounding and Bonding standard.
- DFARS Compliant.

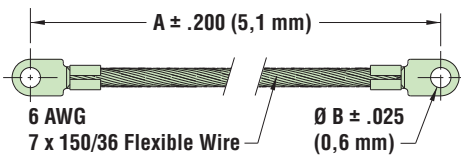

A Length		B Mounting Hole Diameter		PART NO.	DESCRIPTION
in.	mm.	in.	mm		
4.5	114,3	0.250	6,4	<b>S6704</b>	SunJumper 4.5
6	152,4	0.250	6,4	<b>S6506</b>	SunJumper 6
11	279,4	0.250	6,4	<b>S6511</b>	SunJumper 11
18	457,2	0.250	6,4	<b>S6518</b>	SunJumper 18
24	609,6	0.250	6,4	<b>S6524</b>	SunJumper 24
4.5	114,3	0.312	7,9	<b>S6714</b>	SunJumper 4.5-312
6	152,4	0.312	7,9	<b>S6706</b>	SunJumper 6-312
11	279,4	0.312	7,9	<b>S6711</b>	SunJumper 11-312
18	457,2	0.312	7,9	<b>S6718</b>	SunJumper 18-312
24	609,6	0.312	7,9	<b>S6724</b>	SunJumper 24-312




- Create bond between PV module and racking system.
- UL Recognized to UL Standard 2703
- Universal design for quick installation. Extrusions are symmetrically opposed for maximum strength.
- Stainless steel construction for maximum durability.
- DFARS Compliant.

## Heyco® SunStars®

Grounding Spacers for Module to Rack Applications

PART DIMENSIONS				PART NO.	DESCRIPTION
Inside Dia.		Outside Dia.			
in.	mm.	in.	mm.		
.32	8,1	.75	19,1	<b>S6480</b>	SSGS 750-320
		1.00	25,4	<b>S6481</b>	SSGS 1000-320
		1.25	31,8	<b>S6482</b>	SSGS 1250-320



Material 6 AWG tinned copper braided wire (SunJumpers)  
 304 Stainless Steel (SunStars)  
 Certifications Listed under Underwriters' Laboratories File E467246 (SunJumpers)  
 Recognized under the Component Program of Underwriters' Laboratories File E467241 (SunStars)