


"Stay Connected" with



Liquid Tight Cordgrips

a PennEngineering® Company

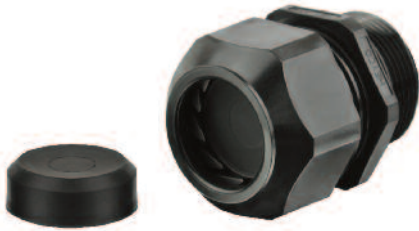

Heyco® -Tite Tear-Away Liquid Tight Cordgrips


Straight-Thru, PG Hubs with Integral Sealing Ring

The Ultimate in Liquid Tight Strain Relief Protection



CABLE DIAMETER RANGE				PART NO.				DESCRIPTION	PART DIMENSIONS									
Minimum		Maximum		Including Nylon Nut*		No Nut			A Clearance Hole Dia.		B Max. O.A. Length		C Thread Length		D Wrenching Nut Thickness		E Flat Size	
in.	mm.	in.	mm.	Black	Gray	Black	Gray		in.	mm.	in.	mm.	in.	mm.	in.	mm.	in.	mm.
PG Hubs																		
.170	4,3	.450	11,4	M3216-SM	M3217-SM	M4764-SM	M4765-SM	SMCG 13.5	.804	20,4	1.53	38,9	.41	10,4	.21	5,3	.98	24,9
.260	6,6	.545	13,8	M3219-SM	M3220-SM	M4766-SM	M4767-SM	SMCG 16	.886	22,5	1.68	42,7	.44	11,2	.25	6,4	1.06	26,9
.435	11,0	.705	17,9	M3222-SM	M3223-SM	M4768-SM	M4769-SM	SMCG 21	1.115	28,3	1.89	48,0	.52	13,2	.25	6,4	1.30	33,0
.590	15,0	1.000	25,4	M3225-SM	M3226-SM	M4770-SM	M4771-SM	SMCG 29	1.470	37,3	2.23	56,6	.57	14,5	.30	7,6	1.73	43,9
.875	22,2	1.260	32,0	M3204-SM	M3203-SM	M4774-SM	M4775-SM	SMCG 36	1.875	47,6	2.39	60,7	.47	11,9	.31	7,9	2.05	52,1
1.230	31,2	1.560	39,6	M3212-SM	M3209-SM	M4742-SM	M4743-SM	SMCG 42	2.130	54,1	2.50	63,5	.48	12,2	.36	9,1	2.46	62,5
1.450	36,8	1.730	43,9	M3281-SM	M3282-SM	M4776-SM	M4777-SM	SMCG 48	2.340	59,4	2.63	66,8	.50	12,7	.42	10,7	2.73	69,3

*Nylon locknuts shipped unassembled.

- The **New Tear-Away** Liquid Tight Cordgrips install as a plug to keep rain, insects and air contaminants outside of an enclosure that is waiting at field installation sites or even within a manufacturing setting for a prolonged period of time.
- **Note:** UL Certifications apply only when used as a cordgrip, not as a plug; When used as a plug, we meet IPx8 @ 2.6 PSI for 24 hrs, and IPx5.
- Units remain internally clean and moisture free until cable installation as a Heyco standard, and market-leading Cable Gland with full functionality that you have come to expect.
- Simply puncture the gland edge with a flat-head screwdriver and Tear-Away the ID for cable pass through like a standard Heyco Cable Gland.
- **Integral Sealing Ring** ensures a superior seal at the clearance or threaded mounting hole location.
- Approved for **NEMA 4, 4X, 6 and 6P applications** with use of nylon locknuts.
- IP 68 rated.
- Cordgrips are made of nylon construction with TPE sealing glands that resist salt water, weak acids, gasoline, alcohol, oil, grease, and common solvents.
- Consult Heyco for Cordgrips molded in other colors.

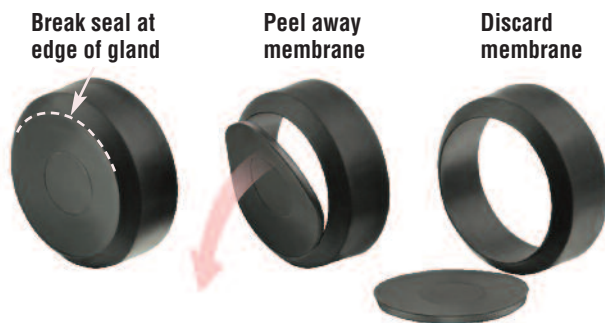

Click here or scan for assembly instructions

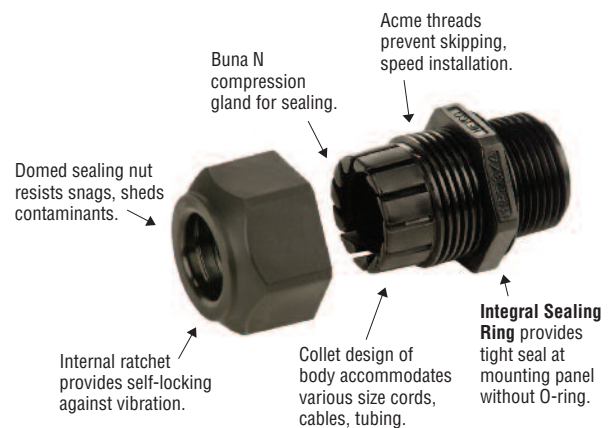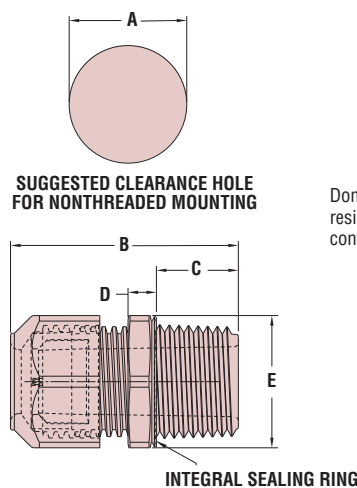

Material
Flammability Rating
Temperature Range

Nylon 6/6 with TPE Sealing Gland
94V-2 Standard
Static -40°F (-40°C) to 239°F (115°C)
Dynamic -4°F (-20°C) to 212°F (100°C)
IP 68 (70 PSI, 5 BAR)
(IPx8 @ 2.6 PSI for 24 hrs and IPx5, when used as plug)

3-SMCG PG

1-800-526-4182 • 732-286-1800 (NJ) • FAX: 732-244-8843 • www.heyco.com