



**NO O-RING
REQUIRED!**






Heyco® -Tite Liquid Tight Cordgrips

Right Angle, PG Hubs with Integral Sealing Ring


The Ultimate in Liquid Strain Relief Protection

Patented Fold Over Design

- Cordgrip is molded in the open position for ease of installation. After cable insertion, the cordgrip snaps closed, bending the cable without damage. This assembly method saves considerable time and money.
- Part design provides liquid tight integrity even in the open position.
- Integral Sealing Ring ensures a superior seal at the clearance or threaded mounting hole location, every time.
- Widest range of approved cable dimensions.
- IP 68 rated.
- Approved for **NEMA 4, 4X, 6 and 6P** applications.
- Acme threads on body prevent skipping and speed installation.
- All nylon construction with TPE sealing gland resists salt water, weak acids, gasoline, alcohol, oil, grease, and common solvents. (This feature is not assessed by UL.)
- We recommend using the fitting with the smallest maximum diameter that will fit your application.
- **Patented.**
- **Unassembled Nylon Locknuts INCLUDED.**
- For Heyco Liquid Tight Threaded Plugs, see page 3-51.
- Consult Heyco for cordgrips molded in other colors.

CABLE DIA. RANGE		PART NO.	DESCRIPTION		PART DIMENSIONS											
Black					A Clearance Hole Dia.		B Right Angle Height		C Max O.A. Length (Closed)		D Thread Length		E Sealing Nut Length		F Wrenching Nut Flat Size	
in.	mm.				in.	mm.	in.	mm.	in.	mm.	in.	mm.	in.	mm.	in.	mm.
.065 - .210	1,7 - 5,3	M8530	RLTCG 7 90		.492	12,5	.69	17,5	1.53	38,8	.32	8,1	.86	21,8	.63	16,0
.115 - .250	2,9 - 6,4	M8532	LTCG 7 90													
.065 - .230	1,7 - 5,8	M8534	RLTCG 9 90		.599	15,2	.88	22,3	1.77	44,9	.32	8,1	1.07	27,1	8.2	20,8
.105 - .315	2,7 - 8,0	M8536	LTCG 9 90													
.069 - .260	1,8 - 6,6	M8538	RLTCG 11 90		.733	18,6	.99	25,1	2.01	51,0	.38	9,7	1.23	31,2	.94	23,9
.230 - .400	5,8 - 10,2	M8540	LTCG 11 90													
.095 - .290	2,4 - 7,4	M4542	RLTCG 13.5 90		.804	20,4	1.06	26,9	2.21	56,1	.41	10,4	1.38	35,1	.98	24,9
.170 - .450	4,3 - 11,4	M8542	LTCG 13.5 90													

Standard color black.

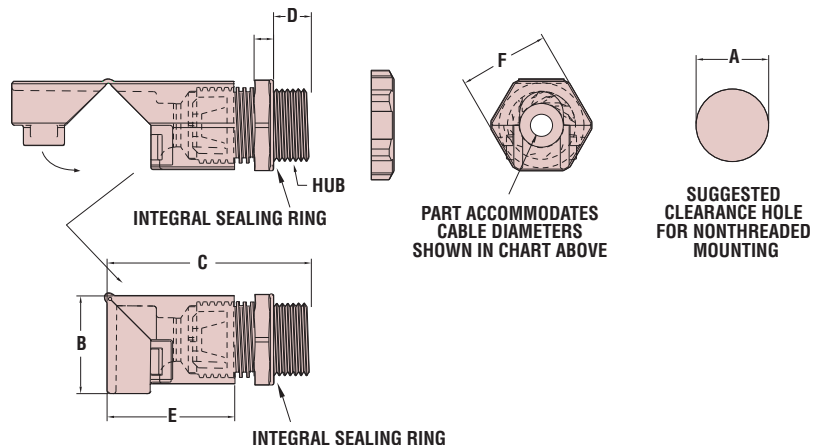

Material	Nylon 6/6 w/TPE Sealing Gland
Certifications	<ul style="list-style-type: none"> UL Listed under Underwriters' Laboratories File E51579 RA Recognized under Components Program of Underwriters' Laboratories File E51579 CSA Certified by Canadian Standard Association File 93876C
Flammability Rating	94V-2
Temperature Range	Static -40°F (-40°C) to 239°F (115°C) Dynamic -4°F (-20°C) to 212°F (100°C)
IP Rating	IP 68 (70 PSI, 5 BAR)

*Quick
Specs*