


“Stay Connected” with



Strain Relief Bushings

a PennEngineering® Company

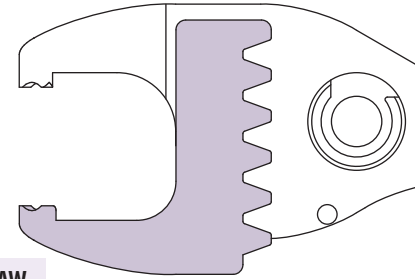

## Heyco® Original Strain Relief Bushing Assembly Pliers Directory and Jaw Settings Guide

MOUNTING HOLE DIA.		Page No.	HEYCO ORIGINAL STRAIN RELIEFS		PLIER JAW OPENING		
in.	mm.		Strain Relief Description for Flat Cables	Page No.	Strain Relief Description for Round Cables	in.	mm.
<b>Use PART NO. 0022 R 29 Plier</b>							
.375	9,5	4-17 4-23	SR 302-1, SR 300-1, SR 2P-4, SR 2L-1 SR 2P-5	4-19	SR 2M-1	No Opening	
.437	11,1	4-17 4-23 4-26	SR 3P-4, SR 3W-1, SR 3L-1 SR 3P-5 SR 13-1			11/32	8,7
.500	12,7	4-17 4-17 4-18 4-22 4-23 4-24 4-26	SR 4P-4, SR 4N-4, SR 4K-4, SR 4L-4 SR 4K-1, SR 4L-1 SR 5W-1, SR 5KN-4, SR 5K-4 SR 4N-6, SR 4K-6 SR 4N-5 SR 4N-7 SR 14-1	4-19 4-19   4-23 4-24 4-25	SR 5MN-3, SR 5M-3, SR 5N-4, SR 5P-4 SR 5L-1, SR 5P3-4, SR 6W-1   SR 5N-5 SR 5N-7, SR 5P-7 SR 15-1	11/32	8,7
.560	14,2	4-18 4-26	SR 30-1 SR 16-1, SR 20-1, SR 20L-1	4-19	SR 30-1A, SR 30-1B	11/32	8,7
.625	15,9	4-18 4-23	SR 6N4-4, SR 6P4-4 SR 6K-5	4-20 4-20 4-23 4-24 4-25 4-34	SR 6N-4, SR 6P-4, SR 6N2-4, SR 6N3-4 SR 6P3-4, SR 6L-1 SR 6P-5, SR 6P2-5, SR 6N3-5, SR 6P3-5 SR 6N-7, SR 6P-7, SR 6N3-7, SR 6P3-7, SR 6P3-7S SR 10N-2, SR 10-2, SR11-2, SR 11K-2 SR 6P10 CEE, SR 6P30 CEE	11/32	8,7
.750	19,1	4-18 4-24 4-26	SR 33-1 SR 7P-7 SR 23-1	4-20 4-25	SR 7P-2 SR 17-2	19/32	15,1
.875	22,2	4-18 4-26	SR 34-2, SR 31-2 SR 24-1	4-21 4-21	SR 7K-2, SR 7KR-2, SR 7W-2, SR 7L-2 SR 31-2, SR 8P-2, SR 8L-1	19/32	15,1
<b>Use PART NO. 0021 R 291 Plier – for .040" (1,0 mm) panel thickness Strain Reliefs</b>							
.437	11,1	4-17	SR 3A-4			11/32	8,7
.500	12,7	4-22 4-26	SR 4A-6 SR 14A-1			11/32	8,7
<b>Use PART NO. 0030 R 30 Plier – more leverage for thicker cables</b>							
.750	19,1	4-18 4-24 4-26	SR 33-1 SR 7P-7 SR 23-1	4-20 4-25	SR 7P-2 SR 17-2	37/64	14,7
.875	22,2	4-18 4-26	SR 34-2, SR 31-2 SR 24-1	4-21 4-21	SR 7K-2, SR 7KR-2, SR 7W-2, SR 7L-2 SR 31-2, SR 8P-2, SR 8L-1	37/64	14,7
1.093	27,8	4-26	SR 21-2	4-21 4-21	SR 9P-2, for 1-3/32" (27,8 mm) MH SR 9P-2, for 1-3/16" (30,2 mm) MH	27/32 1-7/64	21,4 28,2
<b>Use PART NO. 0028 R 301 Plier – for SR 7N-2 and SR 8N-2 only</b>							
.750	19,1			4-20	SR 7N-2	37/64	14,7
.875	22,2			4-21	SR 8N-2		

For Original Strain Relief Assembly **Air Tools**, see page 4-29.