

"Stay Connected" with

HEYCO®

Bushings, Grommets, HEYcaps & Plugs

a PennEngineering® Company

**ALL NEW
PRODUCTS!**



Skinned-Over Thermoplastic Rubber Grommets



Mounting Hole Diameter Range: .500" (12,7 mm) to 3.000" (76,2 mm)

- Plug holes with the confidence of an IP X5 rating.
- Easily applied into hole by hand for secure seal.
- Reliance of a UL 94 V-0 flammability rated material.
- Piercable to allow for single, or multiple, cable pass through.
- Starter Hole required, and eases cable insertion.
- Multiple holes possible with starter hole of 50% of cable diameter.
- Once pierced, no longer IP X5 rated, but airflow, particulate and water pass-through is deterred.
- UL Pending

MOUNTING HOLE DIAMETER		PART NO. Black	DESCRIPTION	Max Cable Diameter		Starter Hole Dia. for Max Cable		PART DIMENSIONS A		B	
in.	mm.			in.	mm.	in.	mm.	Head Diameter in.	mm.	Overall Height in.	mm.
For Panel Thickness from .063~ (1,6 mm) to .094~ (2,4 mm)											
.500	12,7	13852	STRG 500*	.18	4,6	.109	2,77	.85	21,6	.42	10,7
.625	15,9	13854	STRG 625	.25	6,4	.125	3,18	.97	24,6		
For Panel Thickness from .063~ (1,6 mm) to .125~ (3,2 mm)											
.750	19,1	13860	STRG 750	.31	7,9	.125	3,18	1.10	27,9	.42	10,7
.875	22,2	13862	STRG 875	.37	9,4	.125	3,18	1.22	31,0		
1.000	25,4	13864	STRG 1000	.48	12,2	.250	6,35	1.35	34,3		
1.093	27,8	13866	STRG 1093	.48	12,2	.250	6,35	1.44	36,6		
1.250	31,8	13868	STRG 1250	.56	14,2	.500	12,7	1.60	40,6		
1.375	34,9	13870	STRG 1375	.62	15,8	.500	12,7	1.73	43,9		
1.500	38,1	13872	STRG 1500	.68	17,3	.500	12,7	1.85	47,0		
For Panel Thickness from .063~ (1,6 mm) to .094~ (2,4 mm)											
1.750	44,5	13873	STRG 1750	.80	20,3	.750	19,1	2.09	53,1	.42	10,7
2.000	50,8	13874	STRG 2000	.93	23,6	.750	19,1	2.36	59,9		
For Panel Thickness from .063~ (1,6 mm) to .125~ (3,2 mm)											
2.500	63,5	13876	STRG 2500**	1.18	30,0	1.000	25,4	2.85	72,4	.42	10,7
3.000	76,2	13878	STRG 3000**	1.42	36,1	1.250	31,8	3.38	85,9		

*Durometer 70 Shore A for STRG 500

** Sealing performance capped at IP X4

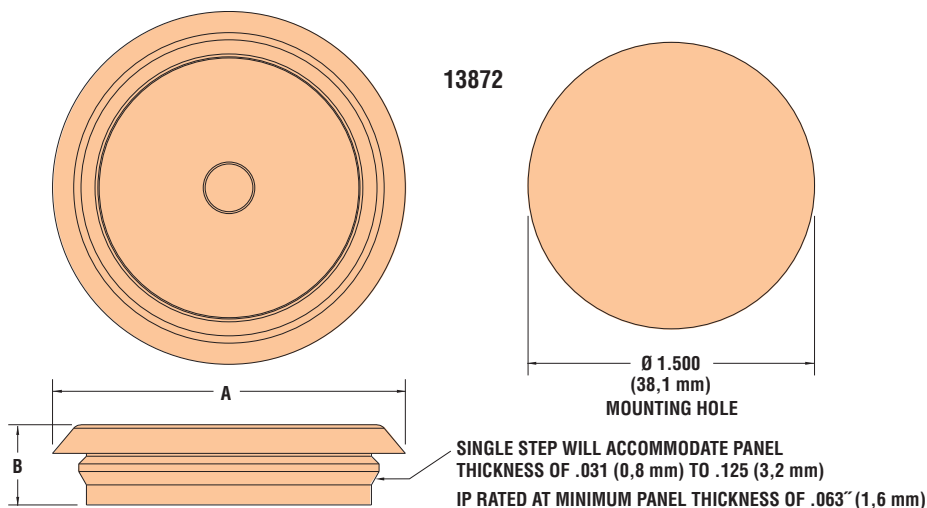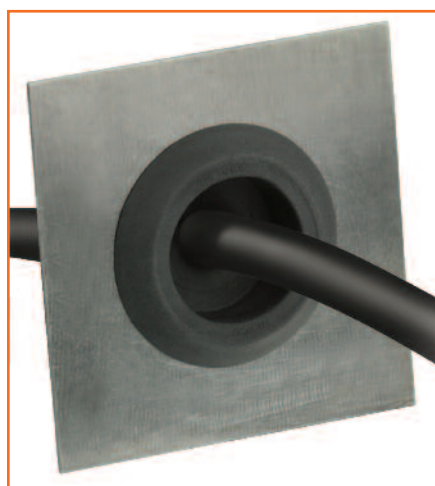

*Quick
Specs*

Material: TPE - Hardness 80 Shore A (*70 Shore A on STRG 500)
 Flammability: UL 94 V-0
 Temperature Range: -81°F (-60°C) to 275°F (135°C)

6-STRG

1-800-526-4182 • 732-286-1800 (NJ) • FAX: 732-244-8843 • www.heyco.com