

“Stay Connected” with



Solar Power Components

a PennEngineering® Company

HEYClip™ Nylon SunRunner® 2 Series Cable Clips for Micro-Inverter Cables

PANEL THICKNESS CLAMPING RANGE				WIRE DIA. RANGE		PART NO.	DESCRIPTION	FOOTPRINT		REAR TAB LENGTH	
Minimum		Maximum		in.	mm.			in.	mm.	in.	mm.
in.	mm.	in.	mm.								
SunRunner 2											
.08	2,0	.25	6,4	.30 - .47	7,6-12,0	S6463	SunRunner 2 100 Pack	.50 x 1.44	12,7 x 36,6	.94	23,9
						S6473	SunRunner 2 Bulk				
SunRunner 2-R											
.38	9,7	.38	9,7	.30 - .47	7,6-12,0	S6462	SunRunner 2-R 100 Pack	.50 x 1.44	12,7 x 36,6	.56	14,2
						S6472	SunRunner 2-R Bulk				
SunRunner 2-U											
.25	6,4	.25	6,4	.30 - .47	7,6-12,0	S6461	SunRunner 2-U 100 Pack	.50 x 1.44	12,7 x 36,6	.53	13,5
						S6471	SunRunner 2-U Bulk				



- Designed to hold Micro-Inverter cables .413" to .472" (10,5 to 12,0 mm) in diameter.
- Constructed from extended protection nylon UV material for **lower cost**, excellent strength, and corrosion protection from outdoor exposure.
- Smooth clip edges prevent damage to cable insulation.
- “S” hook clip design will fit a wide variety of extruded aluminum profiles.
- **SunRunner 2** is designed for solar mounting frames such as the ones used by Unirac, Solar Mount and Mounting Systems.
- **SunRunner 2-R** is designed for racking systems such as the ones used by Haticon Solar and S:FLEX.
- **SunRunner 2-U** features a shorter “S” hook for Unirac and other similar frame profiles.
- Neatly dresses cables on PV panels or along mounting frame channels from .080" (2,0 mm) to .250" (6,4 mm) thick.
- Molded from UV Rated/Heat Stabilized Nylon 6/6.
- See page 1-13 for typical rack profile applications.







SunRunner 2



SunRunner 2-R



SunRunner 2-U

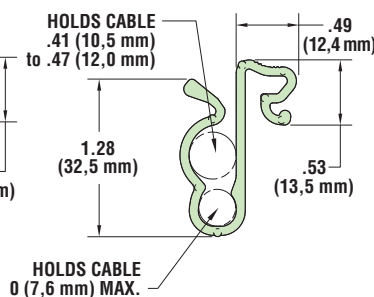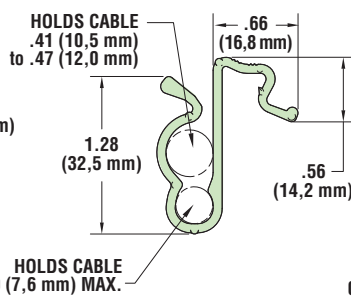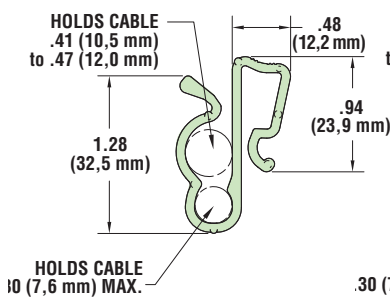

Material Heat Stabilized, UV Rated Nylon 6/6 Black
 Flammability Rating 94V-2
 Temperature Range -4°F (-18°C) to 185°F (85°C)

Quick Specs